



Air Baths

- Refined solution for ultra-stable temperature environment 24/7, 365
- Dry, clean, stable, silent, storage for standard resistors
- Perfect for checking temperature coefficients
- Peltier driven technology
- Keeping the temperature within 10mK over months
- Cascade PID control
- Side access ports for Cables & Probes

Model: **TK-190 US**

Volume: ~ 190 L

Temperature range: + 15 °C ...+ 50 °C

Temperature stability: ± 0.005 °C @ + 23 °C

Temperature uniformity: ± 0.02 °C @ + 23 °C



TK-8 US
(+ 15 °C ...+ 50 °C)



TK-50 US
(+ 15 °C ...+ 50 °C)



TK-105 US
(+ 15 °C ...+ 50 °C)





TK-190 US
(+ 15 °C ...+ 50 °C)



TK-300 US
(+ 18 °C ...+ 35 °C)



TK-300 US

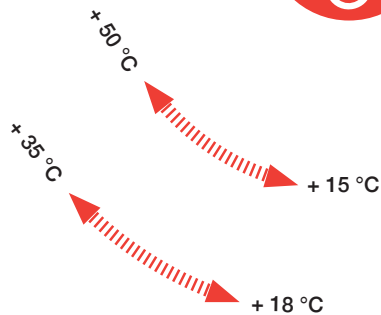

CHAMBER SIZE = CHAMBER VOLUME [liters]	INTERIOR DIMENSIONS (WxHxD) [mm]	EXTERIOR DIMENSIONS (WxHxD) [mm]
8	160 x 330 x 157	230 x 578 x 332
50	400 x 375 x 350	705 x 865 x 640
105	400 x 640 x 410	705 x 1130 x 700
190	570 x 810 x 410	875 x 1300 x 700
300	601 x 1000 x 500	905 x 1490 x 800

*More details in the dedicated Technical Data Sheet.